



BLUE OX

BX1849

2013-15 Nissan Sentra S/SV/SR/SL Installation Instructions

Serial Number

Attachment Tab Height: 14"

Attachment Tab Width: 22"

Please read BOTH these Installation Instructions and the General Instructions prior to installing or operating this equipment.

- Blue Ox® towing products and accessories are intended to be installed by Blue Ox® Dealers who are familiar with our products and have the equipment and knowledge necessary to do "fit work". If needed, Blue Ox® Dealers can be found at www.blueox.com or by contacting our Customer Care Department at (402) 385-3051.
- Many Blue Ox® baseplates are designed to use existing holes and hardware to mount the baseplate to the towed vehicle. Even though bolts are there, do not assume they are adequate for baseplate mounting. Always use the hardware supplied in the hardware kit and existing hardware as specified in the installation instructions.

Bolt Torque Specifications

Torque in Foot-Pounds for Inch Bolts

Bolt Size	Grade 5	Grade 8
1/4"	10	14
5/16"	19	29
3/8"	33	47
7/16"	54	78
1/2"	78	119
5/8"	154	230
3/4"	257	380



Bolt Torque Specifications

Torque in Foot-Pounds for Metric Bolts

Bolt Size	Grade 8.8	Grade 10.9
6MM	6	8
8MM	16	22
10MM	31	40
12MM	54	70
14MM	89	117
16MM	161	230
18MM	222	318

If the front of your vehicle looks different than this, please contact us at (402)385-3051.

Reference your vehicle owner's manual for manufacturer's towing specifications.



WARNING

Failure to read and follow these instructions could result in separation of the towed vehicle from the tow bar, causing property damage, loss of towed vehicle, personal injury or death.

BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions

Instruction Notes: The fascia, fascia cover, air baffle, headlights, metal bumper and windshield washer fluid reservoir are removed and reinstalled for the baseplate installation. Some drilling and trimming is required.

Place all components that are removed on a flat, sturdy surface. All items will be reinstalled unless otherwise noted after the baseplate is installed.

The dimensional variations between otherwise identical vehicles can be considerable. While the baseplate was designed for easy installation, it may be necessary to tailor the baseplate slightly to compensate for vehicle manufacturer's tolerances.

The BX8848 4-Diode Wiring Kit is recommended for this vehicle.

NOTICE

- Handling of some cosmetic parts when installing this product may require the use of protective covers, rags, specialty tools, etc. to prevent damage.
- When using power drills be aware of the dangers of torque and drill bit length.
- When using a reciprocating saw be aware of objects behind the cutting surface.
- Use a good quality paint to spray cut edges of frame to prevent rusting.
- Be sure that **ALL** electrical connections are plugged in and accessories are functioning properly before reinstalling the fascia.
- Do not use the towed vehicle for storing luggage, equipment, etc. This may cause you to exceed the towing capacity of the tow bar, baseplate and its accessories.
- Be sure to use Loctite® Red on all bolts before tightening. Tighten all bolts according to the torque chart provided.
- Dealer or installer be certain the user receives these instruction sheet.
- If the baseplate is in an accident, it must be replaced. **DO NOT** use it again! An accident can cause unseen damage and using it again could result in more damage or serious injury. **DO NOT** use the baseplate if it is damaged or missing parts.


BX1849

2013-15 Nissan Sentra S/SV/SR/SL

Installation Instructions

Tools Required

Large Vise Grip
 Flat Screwdriver
 Utility Knife
 Torque Wrench
 Drill
 Reciprocating Saw
 Tape Measure
 Loctite® RED
 13/32" Drill Bit
 10MM Socket
 14MM Socket
 16MM Socket
 9/16" Socket
 9/16" Wrench

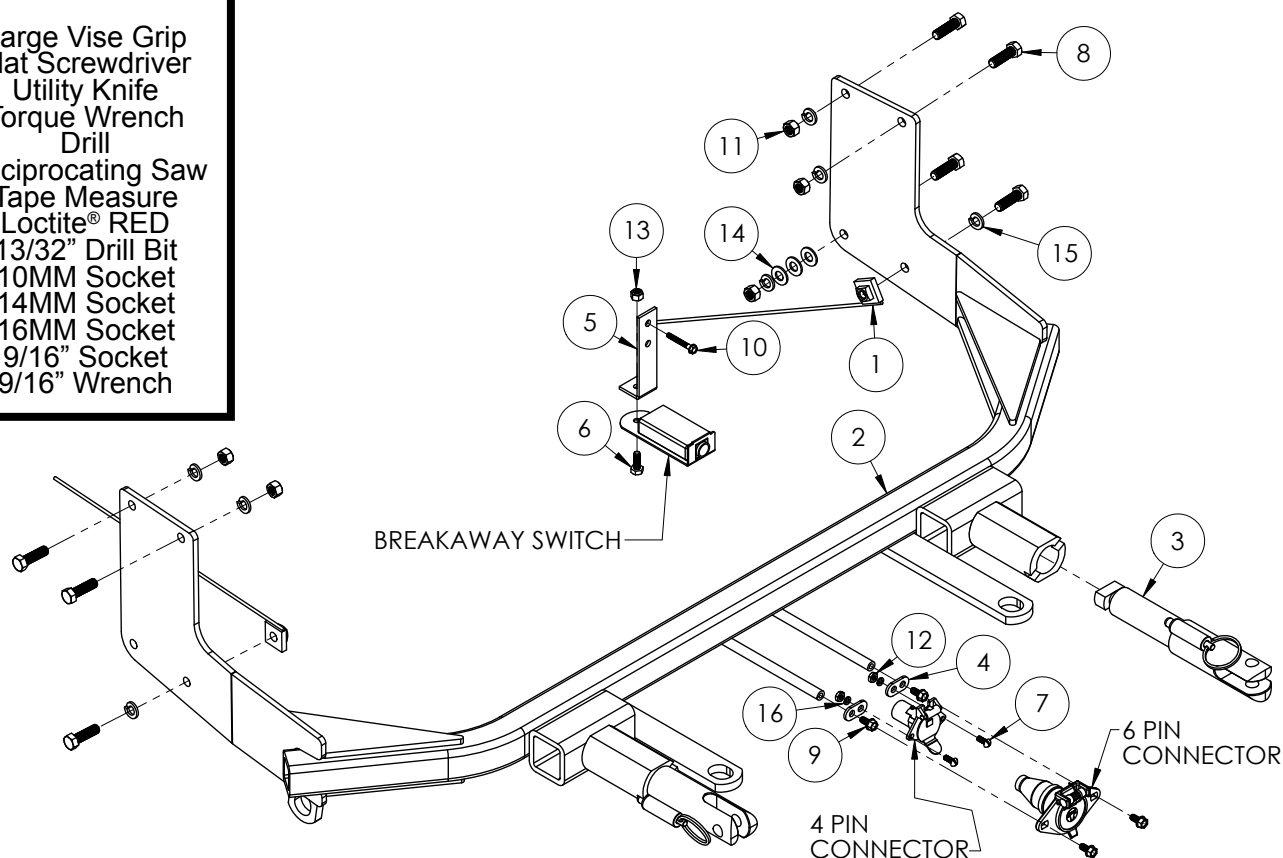


Item No.	Part No.	Description	Qty.
1.....	61-5208.....	3/8"-16 Nut Plate w/ 14" Wire	2
2.....	61-7198.....	BX1849 Baseplate.....	1
3.....	62-3469.....	Attachment Tab Assembly with Hole	2
4.....	101-5822.....	4 Way Connector Adapter	2
5.....	102-7186.....	Breakaway Bracket	1
6.....	201-0050.....	1/4"-20 x 3/4" Hex Head Bolt, Grade 5, ZP	1
7.....	201-0192.....	#10-32 1/2" Round Slotted Head Screw.....	2
8.....	201-0368.....	3/8"-16 x 1-1/4" Hex Head Bolt, Grade 5, ZP	7
9.....	201-0979.....	#12-14 x 1" Self Drilling Screw, ZP.....	2
10.....	201-0654.....	#10-16 x 1" Self Drilling Screw, ZP.....	1
11.....	202-0003.....	3/8"-16 Hex Nut, ZP.....	5
12.....	202-0047.....	#10-32 Hex Nut	2
13.....	202-0102.....	1/4"-20 Hex Nylon Nut, ZP	1
14.....	203-0003.....	3/8" Flat Washer, ZP.....	3
15.....	203-0010.....	3/8" Lock Washer, ZP	7
16.....	203-0054.....	#10 Lock Washer, ZP	2
17.....	226-0046(not shown).....	Class III Safety Cables	2
18.....	229-0359(not shown).....	3/8" Quicklink, ZP	2
19.....	290-0437(not shown).....	Black Cap Plug Receiver.....	2


Important:

Use only genuine factory replacement parts on your baseplate. Do **NOT** substitute homemade or non-typical parts. If a bolt is lost or in need of replacement, for your safety and the preservation of your baseplate, be sure to use a replacement bolt of the same grade (In most cases it will be Grade 5, please reference the parts list above). Replacement parts may be ordered through your nearest Blue Ox® Dealer or Distributor. Failing to follow and/or altering these installation instructions in either installation or required equipment will void the manufacturer's warranty. Towing behind a non-motorized vehicle will void the warranty.

BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions

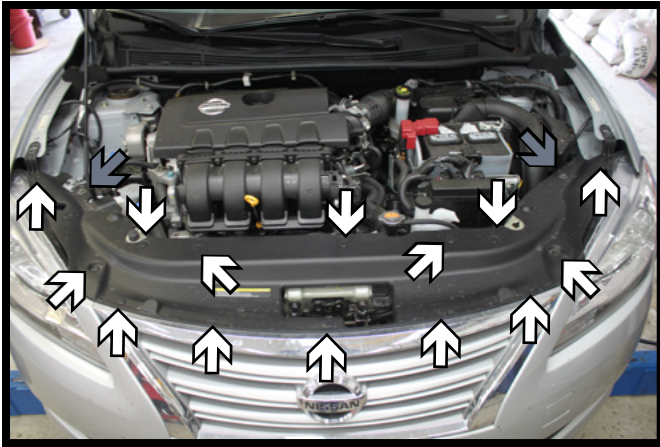


1. Using a 10MM socket, remove the two (2) bolts from the top edge of the fascia cover (gray). Then remove the fourteen (14) push pins from the cover (white). Set the cover aside.

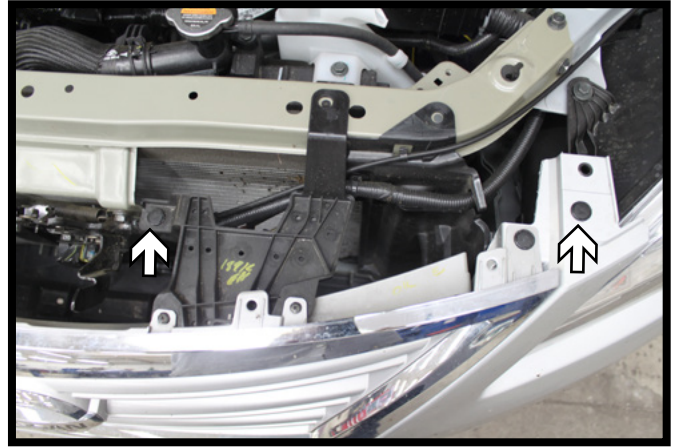

2. Remove the four (4) push pins from the top edge of the fascia. There are two (2) on each side.



3. Using a 10MM socket, remove the bolt from behind the wheel well cover where the fascia meets the fender. Do this on both sides of the vehicle.

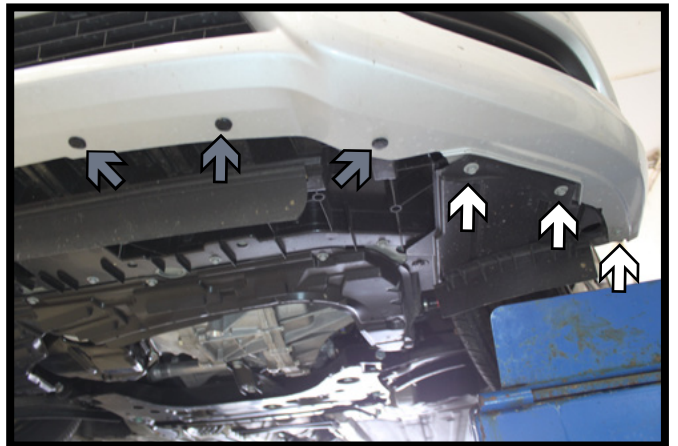


4. From the bottom edge of the fascia, using a 10MM socket, remove three (3) bolts (white). Then remove three (3) push pins (gray). Do this on both sides of the vehicle.


BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions




5. Pull the corners of the fascia out and forward to unclip. Remove the fascia from the vehicle and set aside.

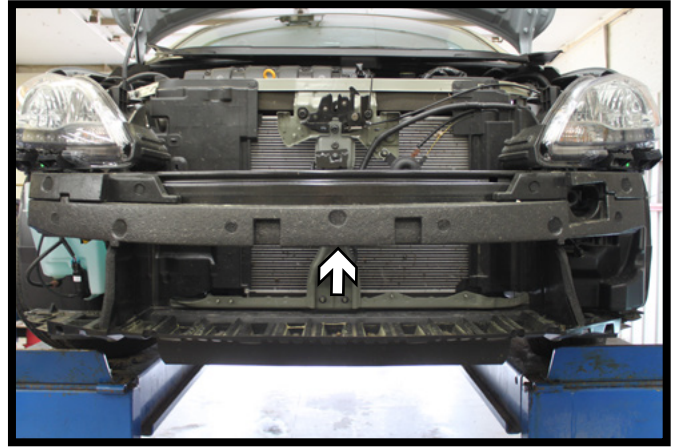

6. Pull the styrofoam support off the metal bumper.

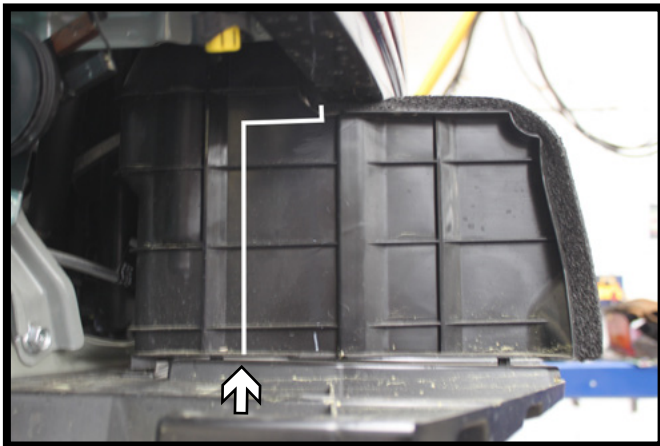


7. Trim the plastic shrouding approximately as shown for baseplate clearance. Do this on both sides of the vehicle.

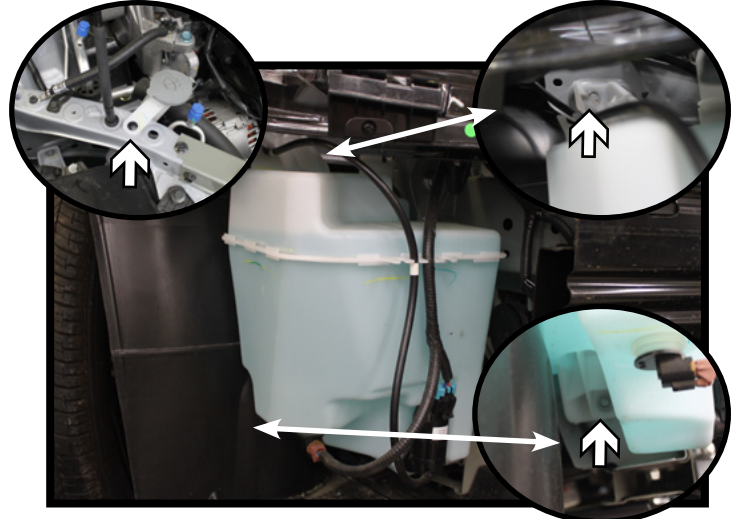


8. On the filler tube of the washer reservoir, remove the push pin by the filler cap (top left). Using a 10MM socket, remove the screws from the top (top right) and bottom (bottom right) of the reservoir. Disconnect electrical lines and plug fluid lines. Set the washer reservoir aside.


BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions

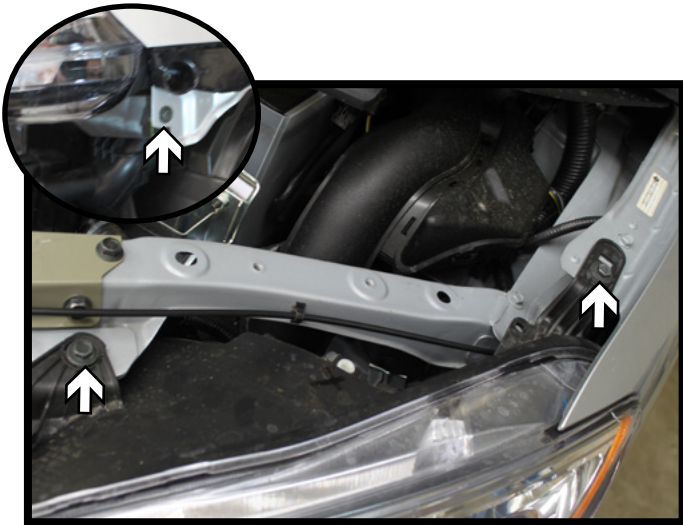


9. Using a 10MM socket, remove the two (2) screws from the top of the headlight and the one (1) from the side (inset). Disconnect the wiring and set the headlight aside. Do this on both sides of the vehicle.

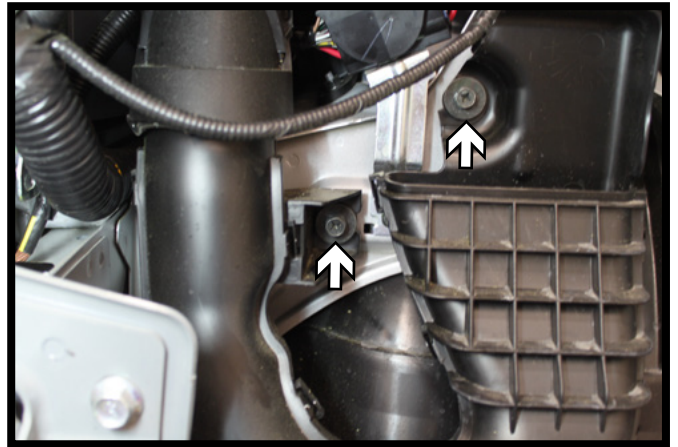

10. Using a 10MM socket, remove the three (3) bolts from the air baffle. There are two (2) on the top (shown) and one (1) on the backside in between the wheel well cover and the baffle.

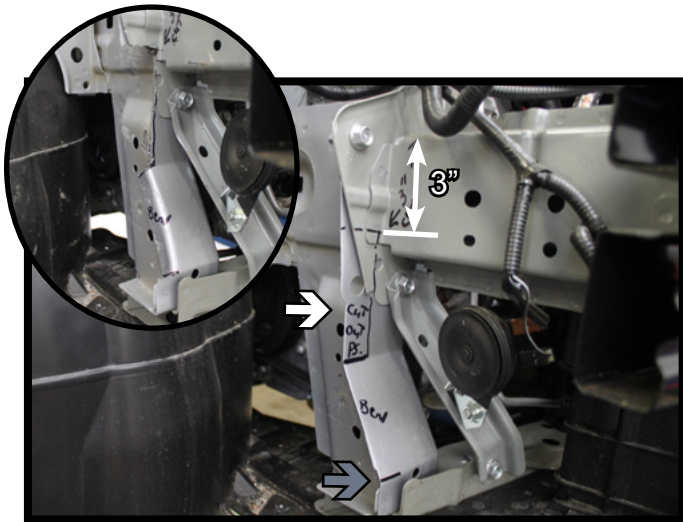


11. On the passenger side, measure down from the top of the frame extension 3" and mark. Mark out a notch from the 3" mark down to the bend flush with the inner frame side. Further down make a mark at the bottom of the bend as deep as the upper notch (gray). Using a reciprocating saw cut the bottom line (gray) and the bottom side of the upper notch. Bend the lip back towards the frame. Continue cutting out the upper notch flush to the inner frame.

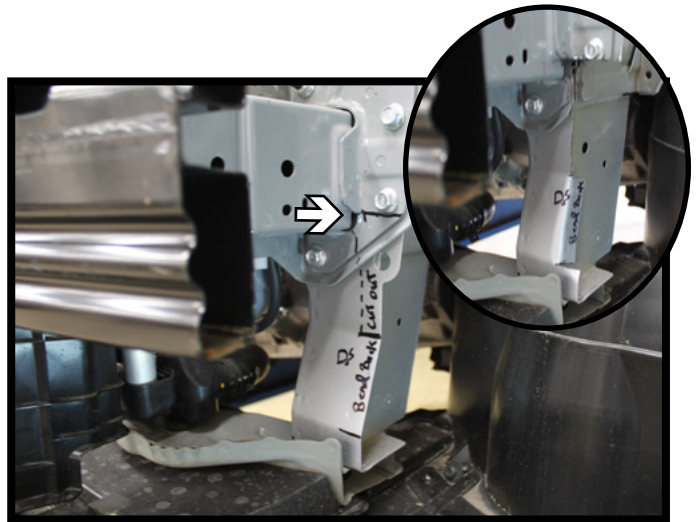

12. The driver side is cut similar to the passenger side only instead of measuring down 3" from the top of the frame extension, cut horizontally under the bolt head.


BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions

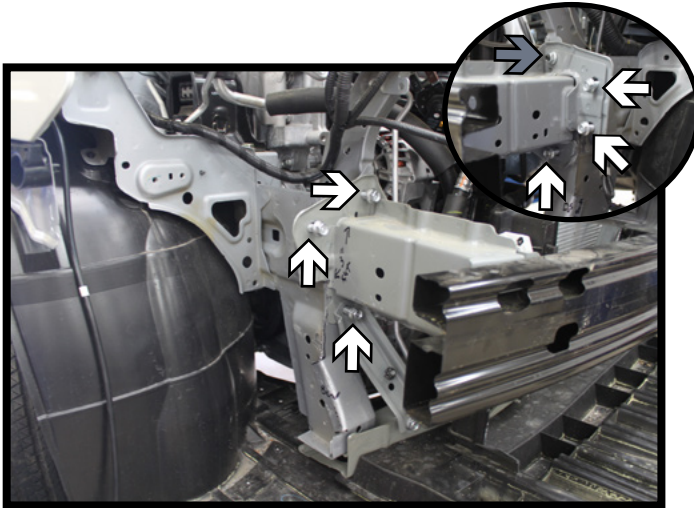


13. Using a 14MM socket, remove the three (3) bolts from the passenger side of the bumper. Then remove the three (3) bolts from the driver side (inset). Also remove the nut on the driver side with a 16MM socket (gray). Set the bumper aside.



14. Flush the baseplate with the top of the frame, level and clamp into position.

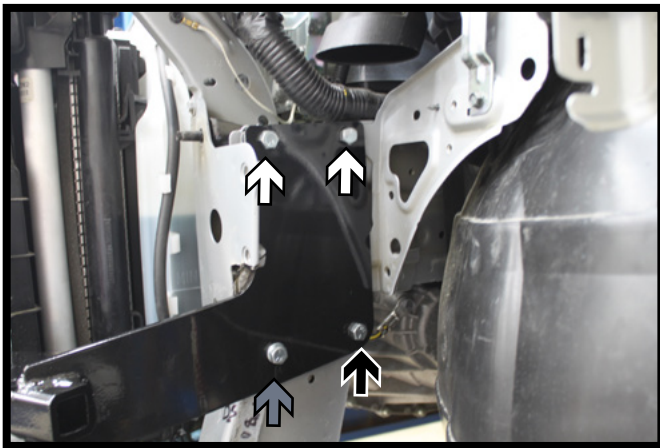

15. Using a 13/32" drill bit, drill the four (4) holes on the driver side and three (3) holes on the passenger side thru the frame. Install 3/8"-16 x 1-1/4" bolts with lock washers into all holes with 3/8"-16 hex nuts on the top four (4) holes of the baseplate (white) and 3/8"-16 nut plates on the front lower holes (gray). On the driver side lower back hole use three (3) 3/8" flat washer and a 3/8"-16 hex nut on the inside of the frame (black).

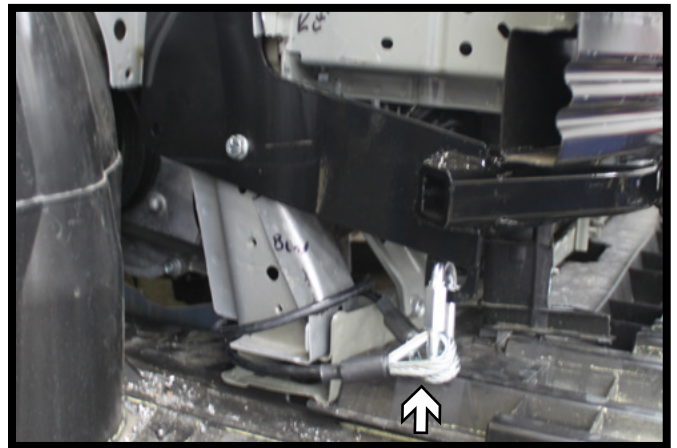

16. Attach the permanent baseplate safety cables to the provided convenience link on the baseplate. The photo above shows the recommended installation of the cables to frame of vehicle. Additional options may interfere with suggested mounting; in this case, secure the cables to a solid piece of the frame as described in the instructions included with the permanent baseplate safety cables. Be sure the safety cables do not rub against any hoses or moving parts. Do this on **BOTH** sides of the vehicle.

BX1849
2013-15 Nissan Sentra S/SV/SR/SL
Installation Instructions



17. Hold the fascia as close to its original position, mark and trim the fascia around the convenience links and attachment tabs. Reinstall the washer reservoir, air baffle, headlights, metal bumper, styrofoam, fascia and fascia cover.

CUSTOMER SERVICE COMMITMENT

Blue Ox® is committed to providing you with exceptional customer care throughout your lifetime with our products. Our team is here to assist you with any questions you may have regarding the performance of your product. Simply call (402) 385-3051 and you can speak with our customer care team.

Additionally, please visit our website to see which rallies our Destination America team will be attending. For a nominal fee, our service technician will service your towing system to ensure it's in proper working condition. Also, as a commitment to our customers, should you visit our factory, you can stay at our full service Blue Ox® campground at no charge along with enjoying a factory tour.

Again, thank you for being our customer and for the confidence you have shown in the performance of our products. It is because of customers like you we enjoy the success we have today.

© 2015 Blue Ox
One Mill Road, Industrial Park
Pender, Nebraska 68047
Phone: (402) 385-3051
Fax: (402) 385-3360
www.blueox.com