

CLASS 1 TRAILER HITCH

**RT-156**

Town & Country/ Voyager/ Caravan

TOOLS REQUIRED:


DRILLS: NONE

WRENCHES: 18mm, 13mm

2,000 LB GROSS TRAILER WEIGHT, 200 LB TONGUE WEIGHT. WARNING: CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS. THIS PRODUCT IS DESIGNED FOR TRAILER TOWING ONLY AND SHOULD NOT BE USED FOR ANY OTHER PURPOSE.

**WARNING: USE ONLY RIGID HITCH APPROVED AND MANUFACTURED DRAW BAR INSERT OR WARRANTY WILL BE VOID**

NOTE: INSTALL PARTS LOOSELY UNTIL ALL ATTACHMENTS HAVE BEEN MADE TO VEHICLE

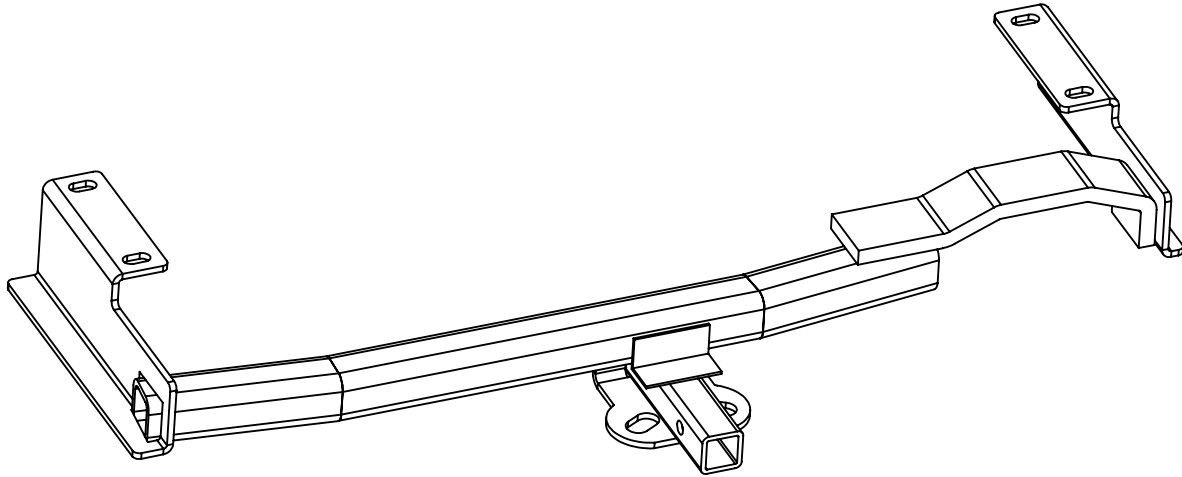

1. Lower the exhaust by removing the 8mm bolt holding the tail pipe hanger to the bottom of the cross frame member on the passenger side of the vehicle.
2. Remove the two bolts from the bottom of each side frame member, retain the bolts for later use.

**CAUTION: When the above bolts are removed the bumper brackets will be free to move inside the frame members. Take care to maintain bumper position. When mounting the hitch, thread bolts by hand to ensure that cross threading does not occur.**

3. Position the hitch on the vehicle with the passenger side portion of the hitch passing above the exhaust.

**NOTE: If the hitch does not clear the spare tire, loosen the spare mounting cable and slide the tire forward enough to provide clearance.**

4. Mount the hitch to the bottom ledge of the side frame members by replacing the four bolts removed in step 2.
5. Place the 1/2" thick spacer block provided between the exhaust hanger bracket and the bottom of the frame member and remount the bracket by replacing the bolt removed in step 1 with the longer 8mm bolt provided.

TIGHTEN ALL FASTENERS TO THE TORQUE SPECIFICATIONS SHOWN BELOW

**HARDWARE PACKAGE:**

- (1) 8mm - 1.25 x 40 Bolt
- (1) 8mm Flat washer
- (1) 8mm Lock washer

- (1) 1/2 x 1-1/4 x 2" Block
- (1) UB-6001 Drawbar kit

**GIVE THIS INSTRUCTION SHEET TO VEHICLE OWNER**

BOLT TIGHTENING TORQUE (LB-FT)			
BOLT SIZE	TORQUE	BOLT SIZE	TORQUE
3/8"	25 LB FT	8MM	20 LB FT
7/16"	50 LB FT	10MM	38 LB FT
1/2"	60 LB FT	12MM	68 LB FT
3/4"	120 LB FT		

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATIONS AND REQUIREMENTS FOR SAE AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. DO NOT MODIFY THIS PRODUCT. INSTALL ONLY ON SPECIFIED VEHICLES IN GOOD CONDITION.

**RIGID**<sup>®</sup>  
**HITCH INCORPORATED**  
 3301 WEST BURNSVILLE PARKWAY  
 BURNSVILLE, MN 55337

REV.  
7/06